


3 CATCH BASIN SEDIMENT FILTER SACK

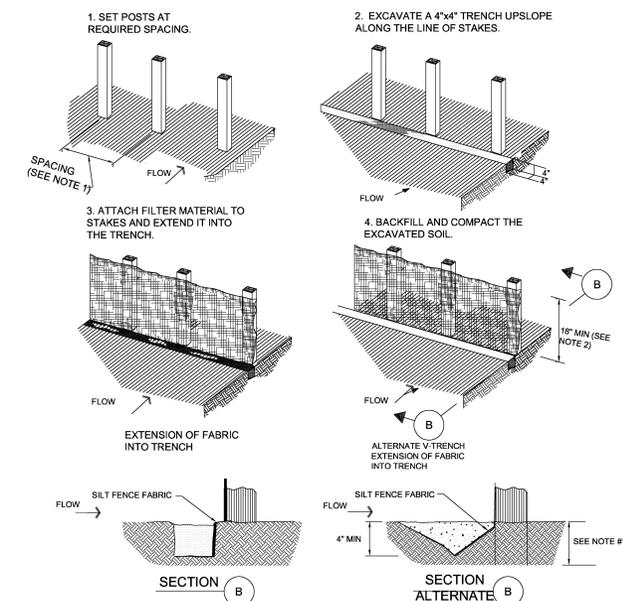


CORRESPONDING NOTES


- 2 INCH THICK BY 2 INCH WOODEN STAKES TO BE SET AT MAX SPACING OF 3 FEET AND EMBEDDED A MIN OF 12 INCHES.
- ATTACH FILTER FABRIC TO WOODEN STAKES. FILTER FABRIC FENCE SHALL HAVE A MIN HEIGHT OF 18 INCHES AND MAX HEIGHT OF 36 INCHES ABOVE NATURAL GROUND.
- WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHOULD BE OVERLAPPED 6 INCHES AT THE POSTS, AND FOLDED.
- SILT FENCE FABRIC SHALL BE MIRAFI CO. 'SILT FENCE STRUCTURE' OR APPROVED EQUAL.

2 SILT FENCE

ISOMETRIC VIEW, NO SCALE

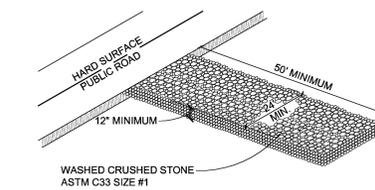

1 ROCK CONSTRUCTION ENTRANCE / EXIT  
 ISOMETRIC VIEW, NO SCALE

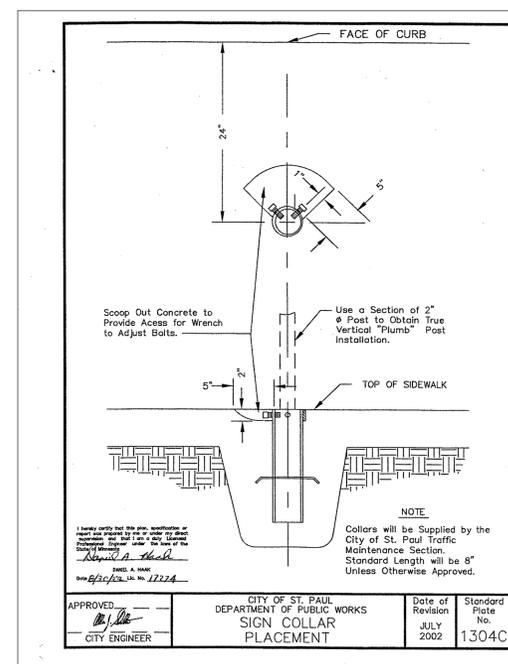

4 BREAKAWAY SIGN SUPPORT BASE



HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.

NAME: KENNETH HORNIS  
 DATE: JUNE 14, 2013  
 REGISTRATION NUMBER: 18235

HGA NO. 0476-061-00

SITE DETAILS

WORK PACKAGE 1

C900