



3 CATCH BASIN SEDIMENT FILTER SACK

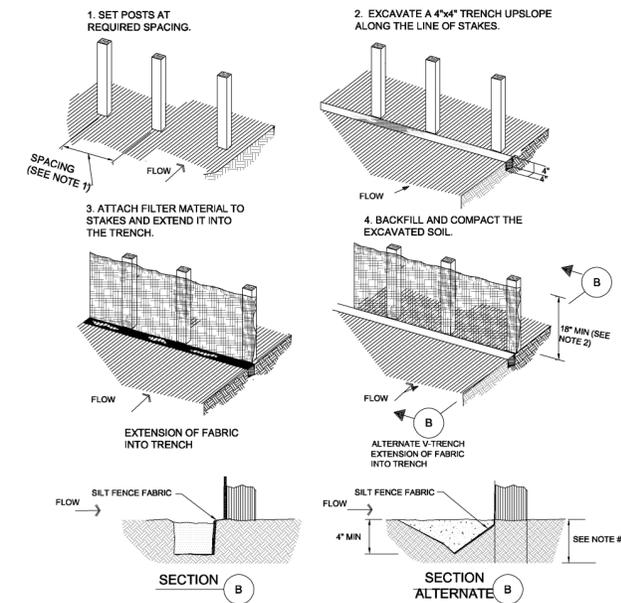


CORRESPONDING NOTES

- 2 INCH THICK BY 2 INCH WOODEN STAKES TO BE SET AT MAX SPACING OF 3 FEET AND EMBEDDED A MIN OF 12 INCHES.
- ATTACH FILTER FABRIC TO WOODEN STAKES. FILTER FABRIC FENCE SHALL HAVE A MIN HEIGHT OF 18 INCHES AND MAX HEIGHT OF 36 INCHES ABOVE NATURAL GROUND.
- WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHOULD BE OVERLAPPED 6 INCHES AT THE POSTS, AND FOLDED.
- SILT FENCE FABRIC SHALL BE MIRAFI CO. 'SILT FENCE STRUCTURE' OR APPROVED EQUAL.


2 SILT FENCE
 ISOMETRIC VIEW, NO SCALE

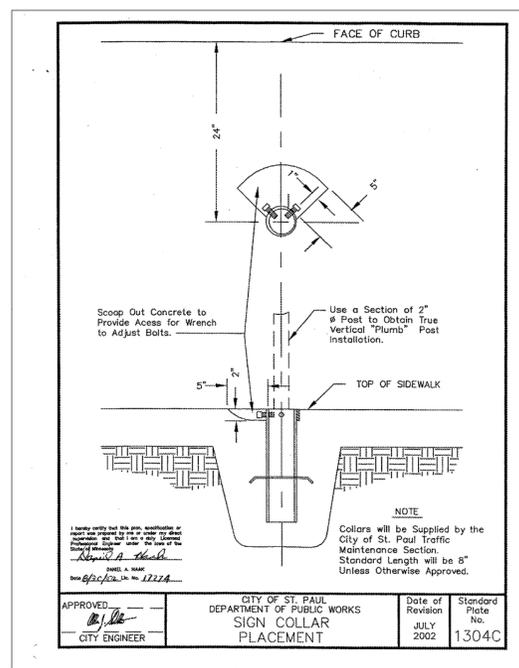

4 BREAKAWAY SIGN SUPPORT BASE

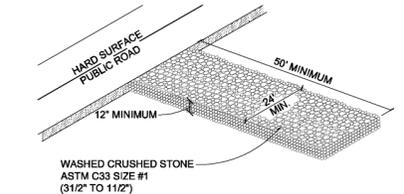

1 ROCK CONSTRUCTION ENTRANCE / EXIT
 ISOMETRIC VIEW, NO SCALE

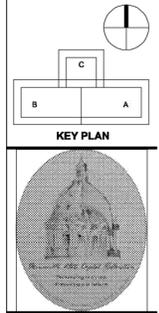

Minnesota State Capitol
 Repairs, Restoration, &
 Preservation
 75 Rev Dr. Martin Luther King Jr Blvd
 Saint Paul, MN 55155
 STATE PROJECT NUMBER - 02CB0015

HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.

NAME: KENNETH HORRIS
 DATE: JUNE 21, 2013
 REGISTRATION NUMBER: 16235

NO	DESCRIPTION	DATE
1	ADD #1	06/28/2013

REVISION HISTORY - THIS SHEET

HGA NO. 0476-061-00

SITE DETAILS

WORK PACKAGE 1

C900