



GENERAL NOTES:

A. THE ELECTRICAL DRAWINGS SHOW ALL EXISTING ELECTRICAL EQUIPMENT AND SYSTEMS AS CAN BE VIEWED OR AS INDICATED ON PREVIOUS ELECTRICAL DOCUMENTS AVAILABLE. THE CONTRACTOR SHALL FIELD VERIFY ALL CONDITIONS TO DETERMINE THE ENTIRE EXTENT OF EXISTING ELECTRICAL SYSTEM EQUIPMENT AND CONTROLS. THESE DRAWINGS SHOW DEMOLITION WORK THAT WILL BE COMPLETED IN TOTAL FOR ALL CONSTRUCTION PHASES, NOT JUST FOR THIS WP-1 SCOPE OF WORK. THE CONTRACTOR SHALL LEAVE ALL EXISTING ELECTRICAL SYSTEM EQUIPMENT AND CONTROLS THAT ARE NECESSARY TO SERVE THE OCCUPIED BUILDING AREAS DURING WP-1, REMOVING ONLY THAT WHICH IS NECESSARY FOR WP-1 DEMOLITION.

B. CONTRACTOR SHALL FIELD VERIFY EXACT CONDITIONS PRIOR TO ANY DEMOLITION. ELECTRICAL CONTRACTOR SHALL MAINTAIN CONTINUITY OF ADJACENT CIRCUITS TO DEVICES OR EQUIPMENT THAT ARE TO REMAIN DURING CONSTRUCTION. REROUTE CONDUIT AND WIRING AS NECESSARY.

C. ELECTRICAL DEVICES AND EQUIPMENT SHOWN AS DASHED ARE TO BE DEMOLISHED AND IT THE RESPONSIBILITY OF THE CONTRACTOR TO DISPOSE OF UNLESS NOTED OTHERWISE. ELECTRICAL DEVICES/EQUIPMENT SHOWN WITH LIGHT SOLID LINE TYPE ARE EXISTING TO REMAIN. ANY ITEMS TO BE TURNED OVER TO FACILITIES MANAGEMENT WILL BE NOTED.

D. EQUIPMENT SHOWN HATCHED IS TO BE DISCONNECTED AND REMOVED. COORDINATE REMOVAL OF EQUIPMENT WITH APPROPRIATE WORKPACKAGES

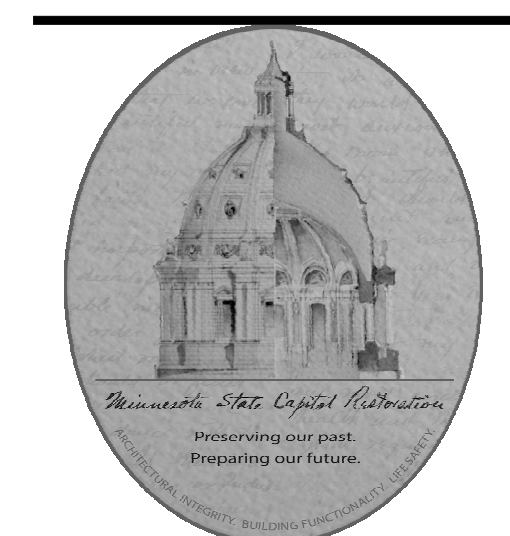

# Minnesota State Capitol Repairs, Restoration, &

**Preservation**  
75 Rev Dr. Martin Luther King Jr Blvd  
Saint Paul, MN 55155  
SCB-02CB0015

I HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MINNESOTA.

NAME: LEIGH HARRISON  
DATE: JUNE 14, 2013  
REGISTRATION NUMBER: 40442

[illegible]

HGA NO: 0476-061-00

NORMAL  
POWER  
DISTRIBUTION  
DIAGRAM -  
DEMOLITION

WORK PACKAGE 1

# E011